


全自动字符两机连印 生产线

Fully automatic character two machine printing production line

根据客户要求可非标生产
Can be custom-made

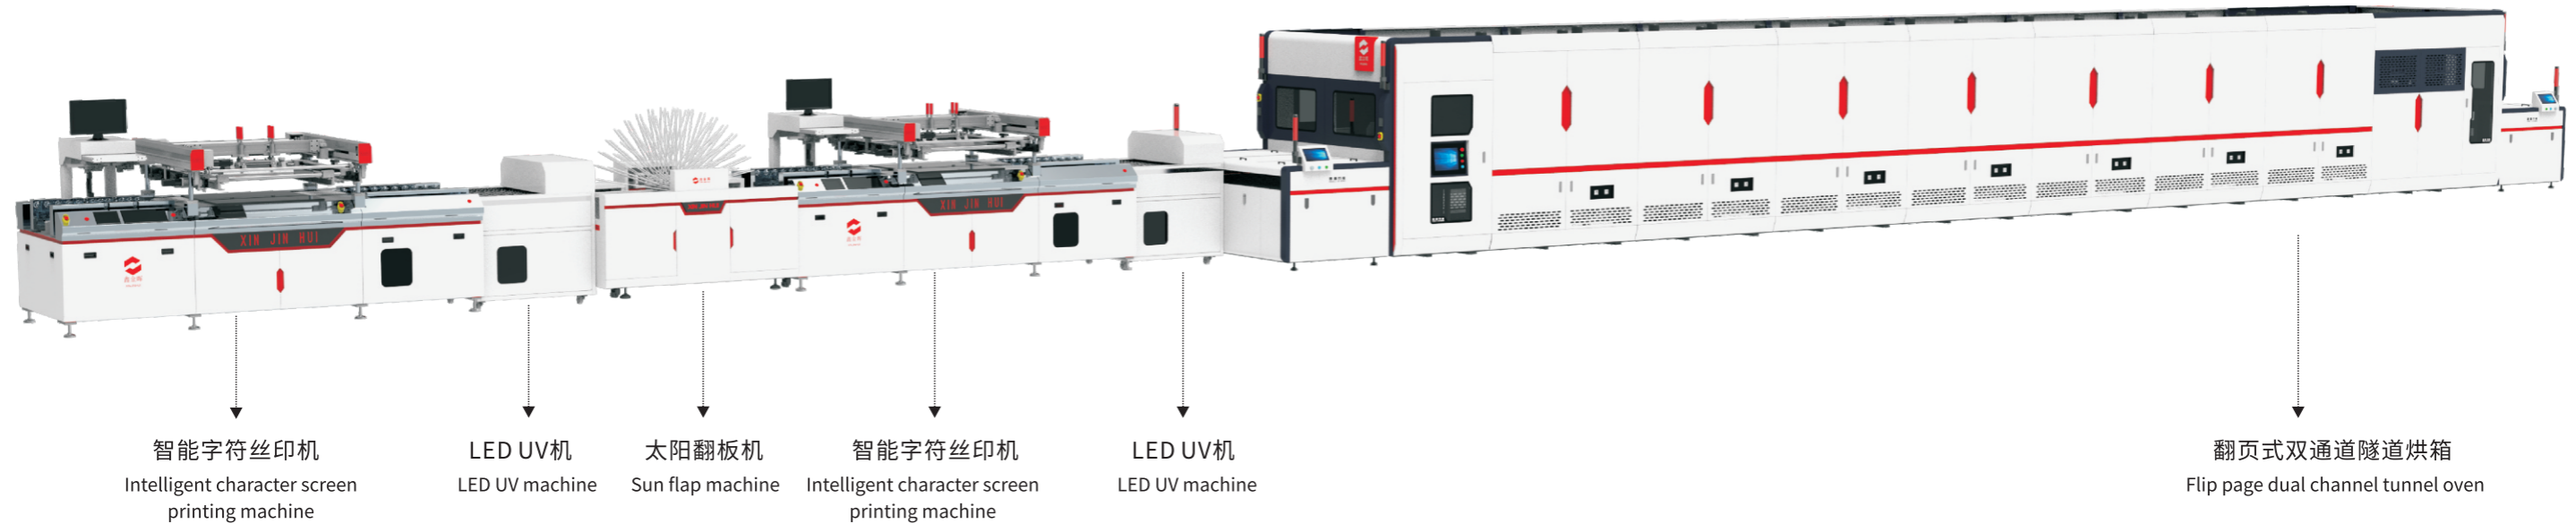

产品特点

- 多项专利技术支持, 品质可靠, 节能减排, 一条生产线仅用电58度/每小时。
- 采用全球顶级电气硬件配置, 以及CCD对位系统, 品质保证, 有效降低报废率。
- 先进设计理念和稳定的机械结构配比, 缩短切换料号时间至3-5min。
- 机械手上、下料, 整线联机作业, 实现完全智能化生产, 至少节省5-7的人工成本。
- 匹配冷光源UV机, 产能达到6-8pin/min, 可每天有**效**生产近4000-6000板材, 有效提升经济效益。
- 确保质量稳定, 高标准的质量要求, 减少返工, 提升**产品品质率**。
- 单机增重3.8吨以上, 保证运行稳定, 使得**印刷精度更高**

Features

- Multiple patented technical support, reliable quality, energy conservation and emission reduction, with a production line using only 58 kWh/hour of electricity.
- Adopting the world's top electrical hardware configuration and CCD alignment system, ensuring quality and effectively reducing scrap rates.
- Advanced design concept and stable mechanical structure ratio, reducing the material number time to 3-5 minutes, achieving an increase of 1000 to 2000 plates per day compared to peers.
- Robot loading and unloading, online operation of the entire line, achieving fully intelligent and automated production, saving at least 5-7 of labor costs.
- Matched with a cold light source UV machine, the production capacity reaches 6-8pin/min, and can effectively produce nearly 4000 to 6000 sheets per day, effectively improving economic efficiency.
- Ensure stable quality, high standard quality requirements, reduce rework, and improve product quality rate.
- The weight increase of a single machine is over 3.8 tons, ensuring stable operation and higher printing accuracy.

产品用途 Usage

- 厚板字符油墨印刷
Thick board character ink printing
- 多层板文字印刷
Multilayer board text printing

| 技术参数 Technical Parameters | |
|---------------------------------------|--|
| 最大印刷面积 Max. Printing Area (Y*X) | 730mm*630mm |
| 最小印刷面积 Min. Printing Area (Y*X) | 400mm*350mm |
| 最大网框尺寸 Max. Frame Size (Y*X) | 1200*1200mm |
| 印刷厚度 Printing Thickness | 0.6mm-4.0mm |
| 机械性能 Mechanical Speed | 6-8PNL/min |
| CCD对位精度 CCD Alignment Accuracy | ±0.005mm |
| 机械重复精度 Mechanical Repetition Accuracy | ±0.005mm |
| 使用工作气压 Operating Air Pressure | 0.5-0.7Mpa |
| 适用电源 Power | 380V 50Hz |
| 工作台面积 Work Table Size (Y*X) | 1000*1050mm |
| 产品输送方向 Product delivery direction | 左进右出或右进左出 Left in right out or right in left out |