


省空间紧凑型端子台

◀ 32位输入/输出端子台

代码	类型	指示灯
YEDZHV01	32位输入/输出端子台	有

特点

- 采用40P的MIL连接器作为进线端，配合本公司相对应的ZIE07、ZIE08线缆，可以直接对应市面上任意一款带32位输入/输出的PLC模块，并且整理为2组16位的端子。
- NPN/PNP双极性输入对应，并且指示灯也会随输入信号的不同而亮不同颜色。（绿色--NPN，PNP--红色）

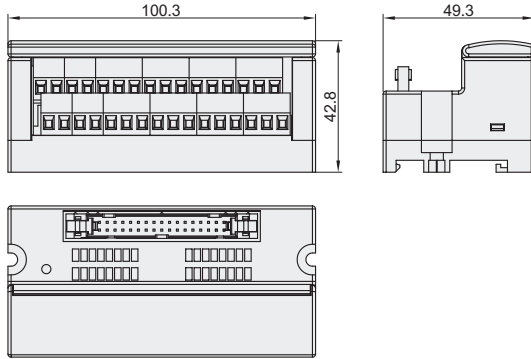


CE



适用电线


1.5mm²以下/AWG16;
剥线长度: 6mm



注意


- 用2个M4的螺丝可固定在零件安装的地方。建议使用M4×16的螺丝，螺纹孔深3mm以上。
- 可安装在标准35mm的DIN导轨上。

配线图

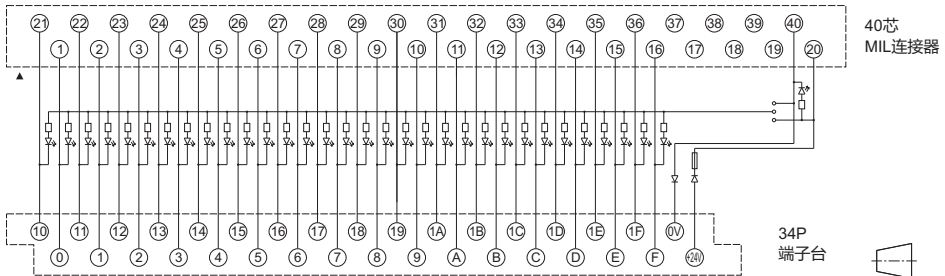

视角标准：第一视角

型号	额定输入电流	额定输入电压	位数	适用电线
代码				
YEDZHV01	1A	DC24V	32	1.5mm ² /AWG 16 剥线长度6mm



适用PLC

PLC品牌	PLC型号						适用电缆	
欧姆龙	C200H-ID111 C200H-ID216 C200H-ID217 C200H-ID218 C200H-ID219 C500-ID219(3G2A5-ID219) CJ1W-ID231	CJ1W-ID261 CQM1-ID112 CQM1-ID213 CQM1-ID214 CS1W-ID231 CS1W-ID261 CS1W-MD261(IN)	CS1W-MD262(IN) CS1W-MD561(IN)				YEDZIE07	
	C200H-OD218 C200H-OD219 C200H-OD21B C500-OD213(3G2A5-OD213) CJ1W-OD231	CJ1W-OD261 CJ1W-MD261(OUT) CQM1-OD213 CQM1-OD216 CS1W-OD231	CS1W-OD232 CS1W-OD261 CS1W-OD262 CS1W-MD261(OUT) CS1W-MD262(OUT)			CS1W-MD561(OUT)	YEDZIE08	
西门子	6ES7321-1BL00-0AA0	6ES7322-1BL00-0AA0					YEDZIC32	
三菱	LY41PT1P QY82P RY42PT1P RY41PT1P	LY42PT1P QH42P QX41Y41P RH42C4NT2P	Qx41 Qx71 QX41-S1 QX41-S2	LX41C4 RX41C4 Qx42 Qx72	QX42-S1 LX42C4 RX42C4 QX82	QX82-S1 QY41P QY42P LY41NT1P	RY42NT2P QY71 LY42NT1P RY41NT2P	YEDZIE05
松下	FP2-X32D2 FP2-C1D(IN) FP2-X64D2	FP2-XY64D2P(IN) FP2-XY64D2T(IN) FP2-XY64D7P(IN)	FP2-XY64D7T(IN) FPG-XY64D2P(IN) FPG-XY64D2T(IN)				YEDZIE10	
	FP2-Y32P FP2-Y32T FP2-Y64P	FP2-Y64T FP2-C1D(OUT) FP2-XY64D2P(OUT)	FP2-XY64D2T(OUT) FP2-XY64D7P(OUT) FP2-XY64D7T(OUT)			FPG-XY64D2P(OUT) FPG-XY64D2T(OUT)	YEDZIE11	