


代码	类型	材质	绝缘外套	表面处理	焊接方式
YEDZIP61	绝缘压着端子 圆形	紫铜	尼龙	镀锡	接缝焊银

特点

- 采用尼龙护套绝缘性能良好，耐久不易老化。

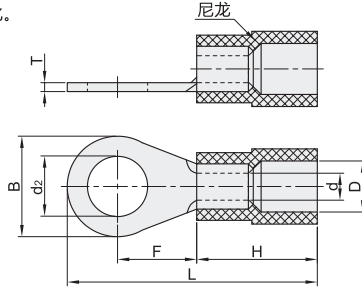

销售方式	每袋数量
袋	见参数表

视图标准：第一视角

型号		适用电线规格		颜色	外形尺寸(mm)								最大电流 I <sub>max</sub>	包装 (PCS/袋)	
代码	压接规格	截面积(mm <sup>2</sup> )	AWG		d <sub>2</sub>	B	F	L	H	D	d	T			
YEDZIP61	1.25	3.2	0.5~1.5	22~16	红	3.2	5.7	4.95	18.8	11	4.3	1.7	0.7	19A	1000
		3.5S				3.7	6.6	6.3	20.6						
		3.5M				8	7	22							
		3.5L				4.3	6.6	6.3	20.6						
		4S				5.3	8	7	22						
		4L				6.4	9.5	7.5	23.3						
		5				8.4	11.6	11.2	28						
		6				10.5	13.6	13.9	31.7						
		8				13	19.2	16	36.6						
		10				3.2	6.6	6.4	20.7						
		12				3.7	7.9	7.9	22.2						
		2				1.5~2.5	16~14	蓝	3.5						
	3.5L		8.5	7.75	23										
	4S		4.3	6.6	7.9				22.2						
	4L		5.3	8.5	7.75				23						
	5S		6.4	9.5	7.5				23.3						
	5L		8.4	12	11				28						
	5.5		4~6	12~10	黄	6	10.5	13.6	13.9	31.7					
						8	13	19.2	16	36.6					
						10	3.7	7.2	5.9	22.5					
						12	4.3	9.5	8.85	26.6					
						4S	6.4	12	10.5	29.5					
						4L	8.4	15	13.5	34					
	8	6~10	8	红	8	4.3	8	8	29.3						
10					5.3	8.8	9.3	29.7							
12					6.4	12	9.3	31.3							
4S					8.4	15	11.1	37.3							
5S					10.5	20	15	41							
5M					13	19.2	16	38.6							
14	10~16	6	蓝	4	4.3	8	8	29.3							
				5	5.3	12	13.3	40.8							
				6S	6.4	16	14.5	43.5							
				8	8.4	22	19.5	52							
				10	10.5	16	14.5	43.5							
				12	13	20	15	41							

压着端子

请按图示订货

型号		
代码	压接规格	螺丝规格
YEDZIP61	14	4
		5



YEDZIP61-14-4