

YEDSD-P系列交流接触器


3极

DC直流 台湾士林品牌




产品尺寸图


YEDSD-P11

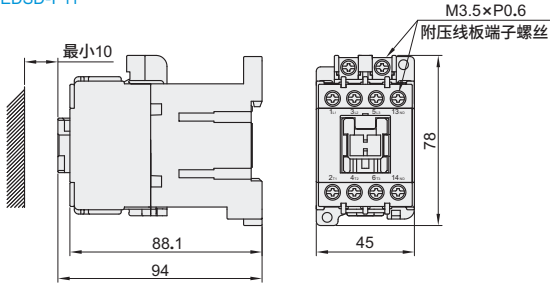


安装尺寸图




接口构成




YEDSD-P16/YEDP21

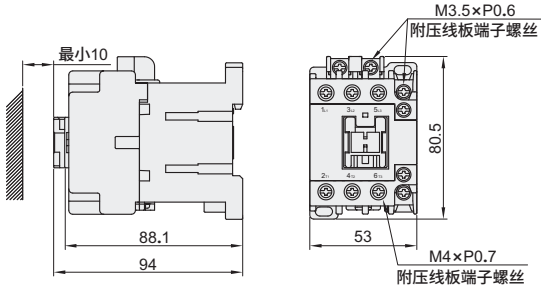

安装尺寸图



接口构成



视角标准：第一视角

型号 代码	框架电流(A)	辅助触头构成	控制线圈 电压(V)	极数
YEDSD-P11-10-DC24	11	1NO	DC24	3
YEDSD-P11-01-DC24		1NC		
YEDSD-P16-11-DC24	16	1NO 1NC		
YEDSD-P21-11-DC24	21			



型号
代码
YEDSD-P11-10-DC24
YEDSD-P11-01-DC24
YEDSD-P11-10-DC24



热过载继电器详见P174。

技术参数

		代码		SD-P11	SD-P16	SD-P21	
额定容量	GB14048.4	AC3 (KW/A)	三相	240V	3.5/13	4.5/18	5.5/24
				380V	5.5/12	7.5/18	11/21
				440V	5.5/12	7.5/18	11/21
				550V	5.5/9	7.5/13	11/17
				AC1(A)	20	30	32
	IEC6094 7-4-1	AC3 (KW/A)	三相	240V	3.5/13	4.5/18	5.5/24
				440V	5.5/12	7.5/16	11/21
				550V	5.5/9	7.5/13	11/17
				660V	5.5/7	7.5/9	11/14
				AC1(A)	20	30	32
	UL508	AC3 (HP/A)	单相	110V~120V	0.5/9.8	1/16	2/24
				220V~240V	2/12	3/17	3/17
220V~240V				3/9.6	5/15.2	7.5/22	
三相			440V-480V	7.5/11	10/14	15/21	
			550V-600V	10/11	10/11	15/17	
			AC1(A)	24	30	35	
辅助触头构成				1a或1b	1a1b	1a1b	
控制线圈电压(V)				DC24V			

接触器