

管接头


直接型/90°弯接型 快速接头

代码	类型	材质	颜色	防护等级	阻燃等级	工作温度
YEDZIG20	快速接头	尼龙66	黑色	IP68	UL94V-2	-40°C ~ +120°C
YEDZIG21	90°弯接型					


特点：特殊夹紧爪之设计，夹紧浪管抗拉力强，超快速拔插装卸，提高安装效率。



直接型
YEDZIG20

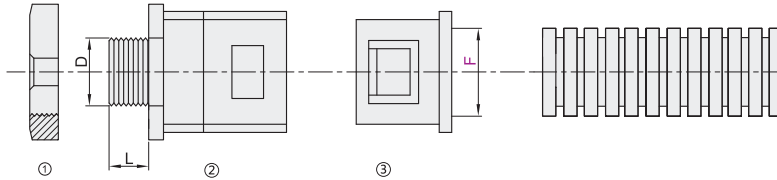

90°弯接型
YEDZIG21

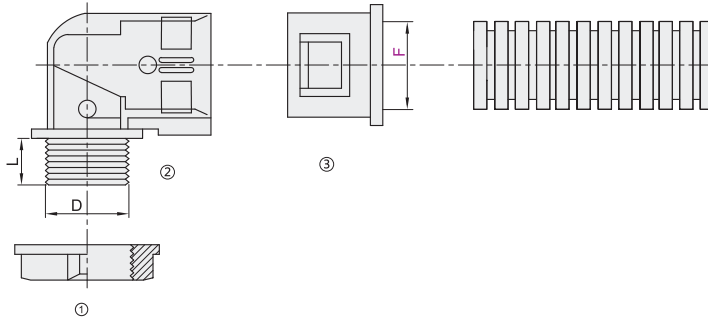

本产品不包含波纹管，波纹管需要另外购买。



软管、线槽
保护管

直接型

代码	型号	螺纹规格	螺纹	螺纹外径 D	螺纹长度 L
	适配软管尺寸 F				
YEDZIG20	10	M12	M12×1.5	12	8.5
	13	M16	M16×1.5	16	10
	15.8	M18	M18×1.5	18	12.5
	21.2	M20	M20×1.5	20	13
	25	M25	M25×1.5	25	13
	28.5	M32	M32×1.5	32	14
	34.5	M40	M40×1.5	40	15
	42.5	M50	M50×1.5	50	16
	54.2	M63	M63×1.5	63	16
	10	PG7	PG7	12.4	8.5
	13	PG9	PG9	15.2	10
	15.8	PG11	PG11	18.4	12.5
	21.2	PG16	PG16	22.5	13
	28.5	PG21	PG21	28.3	13
	34.5	PG29	PG29	37	14
	42.5	PG36	PG36	47	15
54.5	PG48	PG48	59.3	16	

90°弯接型

代码	型号	螺纹规格	螺纹	螺纹外径 D	螺纹长度 L
	适配软管尺寸 F				
YEDZIG21	10	M12	M12×1.5	12	8.5
	13	M16	M16×1.5	16	10
	15.8	M18	M18×1.5	18	12.5
	21.2	M20	M20×1.5	20	13
	25	M25	M25×1.5	25	13
	28.5	M32	M32×1.5	32	14
	34.5	M40	M40×1.5	40	15
	42.5	M50	M50×1.5	50	16
	54.2	M63	M63×1.5	63	16
	10	PG7	PG7	12.5	10
	13	PG9	PG9	15.2	10
	15.8	PG11	PG11	20.4	12.5
	21.2	PG16	PG16	22.5	13
	28.5	PG21	PG21	28.3	13
	34.5	PG29	PG29	37	14.5
	42.5	PG36	PG36	47	15
54.5	PG48	PG48	59.3	16	

直接型

型号	螺纹规格
代码 适配软管尺寸 F	
YEDZIG20	10 M12
	13 M16

YEDZIG20—F10—M12

90°弯接型

型号	螺纹规格
代码 适配软管尺寸 F	
YEDZIG21	10 M12
	13 M16

YEDZIG21—F10—M12

