

扎带


◀ 常规
通用型



代码	类型		材质	标准温度范围	可按要求提供	
					低温环境	高温环境
YEDZD001	通用	常规	常规	-20°C-85°C	-40°C-85°C	-20°C-120°C


尺寸详解: 例如

- (3*100国标宽2.5 1000条) 3是型号(行业称谓)可不看2.5是扎带的实际宽度, 看图上100是指扎带总长度单位毫米

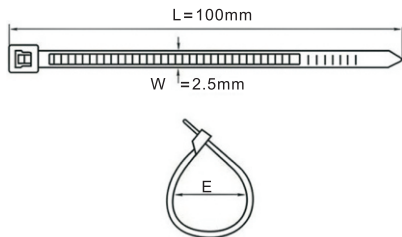


销售方式

包



扎带拉力参考指数



型号 代码	尺寸Size mm	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环境拉力 Min.Loop Tensile Strength.	
		mm	inch	mm	inch	mm	inch	kgs	lbs
YEDZD001	2.5*100	2.5	0.01	100	3.94	22	0.87	8	18
	2.5*120	2.5	0.01	120	4.73	30	1.19	8	18
	2.5*150	2.5	0.01	150	5.91	35	1.38	8	18
	2.5*200	2.5	0.01	200	7.88	53	2.09	8	18
	3.6*120	3.6	0.15	120	4.73	30	1.19	18	40
	3.6*150	3.6	0.15	150	5.91	35	1.38	18	40
	3.6*200	3.6	0.15	200	7.88	53	2.09	18	40
	3.6*250	3.6	0.15	250	9.85	65	2.56	18	40
	3.6*300	3.6	0.15	300	11.82	76	2.98	18	40
	3.6*350	3.6	0.15	350	13.78	90	3.55	18	40
	3.6*400	3.6	0.15	400	15.75	105	4.14	18	40
	3.6*450	3.6	0.15	450	17.72	115	4.53	18	40
	3.6*500	3.6	0.15	500	19.69	130	5.12	18	40
	4.8*200	4.8	0.19	200	7.88	53	2.09	22	49
	4.8*100	4.8	0.19	250	9.85	65	2.56	22	49
	4.8*120	4.8	0.19	300	11.82	76	2.98	22	49
4.8*150	4.8	0.19	350	13.78	90	3.55	22	49	
4.8*200	4.8	0.19	400	15.75	105	4.14	22	49	
4.8*120	4.8	0.19	450	17.72	115	4.53	22	49	
4.8*150	4.8	0.19	500	19.69	130	5.12	22	49	
7.6*200	7.6	0.30	200	7.88	53	2.09	55	120	
7.6*250	7.6	0.30	250	9.85	65	2.56	55	120	
7.6*300	7.6	0.30	300	11.82	76	2.98	55	120	
7.6*350	7.6	0.30	350	13.78	90	3.55	55	120	
7.6*400	7.6	0.30	400	15.75	105	4.14	55	120	
7.6*450	7.6	0.30	450	17.72	115	4.53	55	120	
7.6*500	7.6	0.30	500	19.69	130	5.12	55	120	
7.6*550	7.6	0.30	550	21.66	165	6.5	55	120	

扎带



请按图示订货

型号	长	宽	最大捆绑范围	最小环境拉力	
YEDZD001	2.5*100	W2.5mm	L100mm	22mm	8kgs

YEDZD001-2.5*100-W2.5mm-L100mm-22mm-8kgs