


YEDNABLE-32小型漏电保护断路器

1极+N/2极/3极/3极+N/4极
正泰品牌

特点

- 符合标准: GB/T 16917.1, IEC61009-1;
- 符合认证: CCC;
- 主要功能: 过载、短路、剩余电流动作;
- 额定电流: 6A、10A、16A、20A、25A、32A;
- 额定剩余动作电流: 0.03A;
- 额定绝缘电压: 500V;
- 频率: 50Hz;
- 电磁脱扣器类型: C;
- 机械寿命: 20000次;
- 电气寿命: 10000次;
- 额定冲击耐受电压: 4kV。

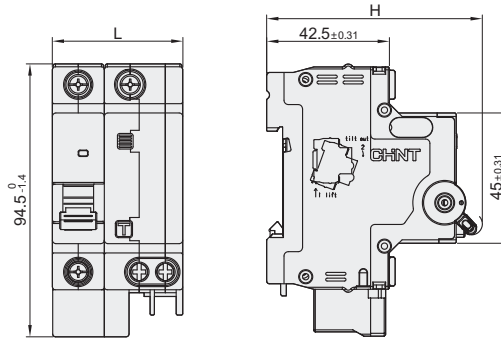

极数	1P+N		2P		3P		3P+N		4P	
L(mm)	45	-0.62	63	-0.74	90	-0.4	99	-0.4	117	-0.4
H(mm)	76.8	-1.2	77.8	-1.2	77.8	-1.2	77.8	-1.2	77.8	-1.2



型号 代码	额定电流	极数	脱扣特性	分断能力	脱扣动作电流	额定电压
YEDNABLE-32 1P+N C6 30mA 6kA	6	1P+N	C	6kA	30mA	230VAC
YEDNABLE-32 1P+N C10 30mA6kA	10					
YEDNABLE-32 1P+N C16 30mA 6kA	16					
YEDNABLE-32 1P+N C20 30mA6kA	20					
YEDNABLE-32 1P+N C25 30mA6kA	25					
YEDNABLE-32 1P+N C32 30mA6kA	32	2P	C	6kA	30mA	230VAC
YEDNABLE-32 2P C6 30mA6kA	6					
YEDNABLE-32 2P C10 30mA6kA	10					
YEDNABLE-32 2P C16 30mA6kA	16					
YEDNABLE-32 2P C20 30mA6kA	20					
YEDNABLE-32 2P C25 30mA6kA	25					
YEDNABLE-32 2P C32 30mA6kA	32	3P	C	6kA	30mA	230VAC
YEDNABLE-32 3P C6 30mA6kA	6					
YEDNABLE-32 3P C10 30mA6kA	10					
YEDNABLE-32 3P C16 30mA6kA	16					
YEDNABLE-32 3P C20 30mA6kA	20					
YEDNABLE-32 3P C25 30mA6kA	25					
YEDNABLE-32 3P C32 30mA6kA	32	3P+N	C	6kA	30mA	400VAC
YEDNABLE-32 3P+N C6 30mA6kA	6					
YEDNABLE-32 3P+N C10 30mA6kA	10					
YEDNABLE-32 3P+N C16 30mA6kA	16					
YEDNABLE-32 3P+N C20 30mA6kA	20					
YEDNABLE-32 3P+N C25 30mA6kA	25					
YEDNABLE-32 3P+N C32 30mA6kA	32	4P	C	6kA	30mA	400VAC
YEDNABLE-32 4P C6 30mA6kA	6					
YEDNABLE-32 4P C10 30mA6kA	10					
YEDNABLE-32 4P C16 30mA6kA	16					
YEDNABLE-32 4P C20 30mA6kA	20					
YEDNABLE-32 4P C25 30mA6kA	25					
YEDNABLE-32 4P C32 30mA 6kA	32					



请按图示订货

型号
YEDNABLE-32 1P+N C6 30mA6kA
YEDNABLE-32 1P+N C10 30mA 6kA

YEDNABLE-32 1P+N C6 30mA 6kA

报价
方式

